

# D Series 110mm Downlighter



D  
Series

www.fluorel.co.uk

## Reflectors



11/14

### Features

- Die-cast twist & lock bezel with interchangeable accessories
- Choice of colour temperatures
- Integrated Driver & optic
- 640 lumens at 13w
- Mains dimming
- Life 50,000 hours (L70)

### Bezel colour



### Lamps

- 1 x 14W PLR
- 1 x 18W PLT
- 1 x 26W PLT
- 640 lumen

### Control gear

- Standard (high frequency)
- **/DIM** 1-10V dimming
- **/ECO** DSI digital dimming
- **/DALI** Dali dimming

### Emergency options

#### **/ILEM**


Integral mounted 3hr emergency LED

#### **/STILEM**


Integral mounted 3hr self test emergency LED

### Technical drawings

#### 6.90

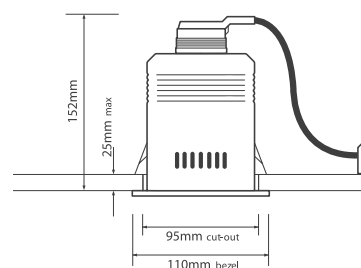

#### 80

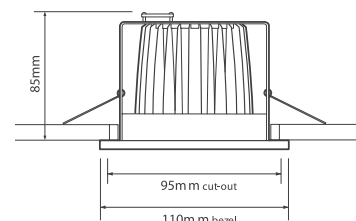

**Fluorel** Lighting  
Lighting for a brighter future

**Fluorel Lighting is a leading supplier  
of innovative energy efficient lighting**

# 110mm Attachments [www.fluorel.co.uk/products/PDFs](http://www.fluorel.co.uk/products/PDFs)

## Decorative Bezel



## Accessories



# 110mm Technical

## 80 Series 110mm Bezel Modules: Fortimo LED, Integrated Spot Nominal weight: 0.5kg

Model Ref	Colour Temp (K)	Colour Rendering (Ra)	Life (L70) (hours)	Module output (lm)	System power (tcW)	System efficacy (lm/tcW)	Luminaire LOR (%)	Luminaire efficacy (llm/tcW)
80.600.30	3000	80	50,000	640	13.0	51.0	100	51.0
80.600.40	4000	80	50,000	640	13.0	51.0	100	51.0

## 6.90 Series 110mm

Model Ref	Wattage	Colour Temp (K)	Lamp Type
6.901014L	1 x 14w	4000	PLR
6.901018L	1 x 18w	4000	PLT
6.901026L	1 x 26w	4000	PLT

## Fluorel Lighting Limited Designers and manufacturers of lighting fittings

Unit 25 Eldon Way, Hockley  
Essex SS5 4AD  
Tel +44(0)8458 643 643 Fax +44(0)20 8506 1792  
info@fluorel.co.uk www.fluorel.co.uk

