




Stone Pediment D 1 No. Required

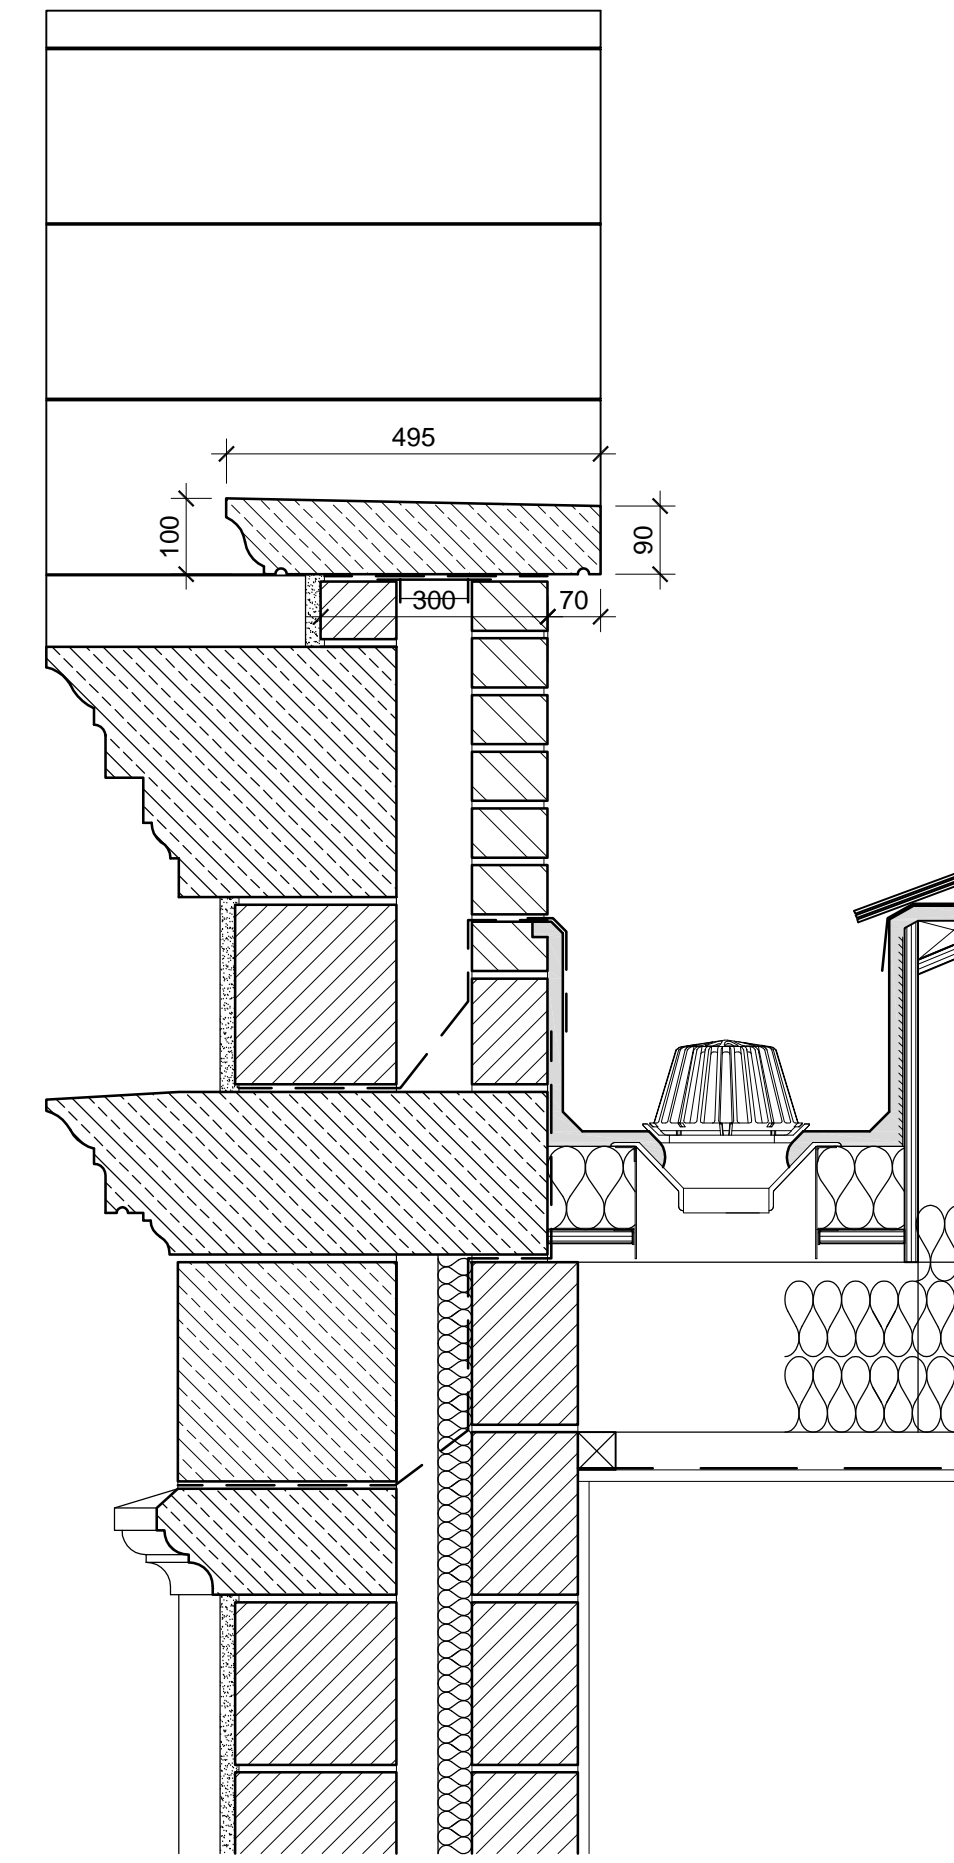

Section G

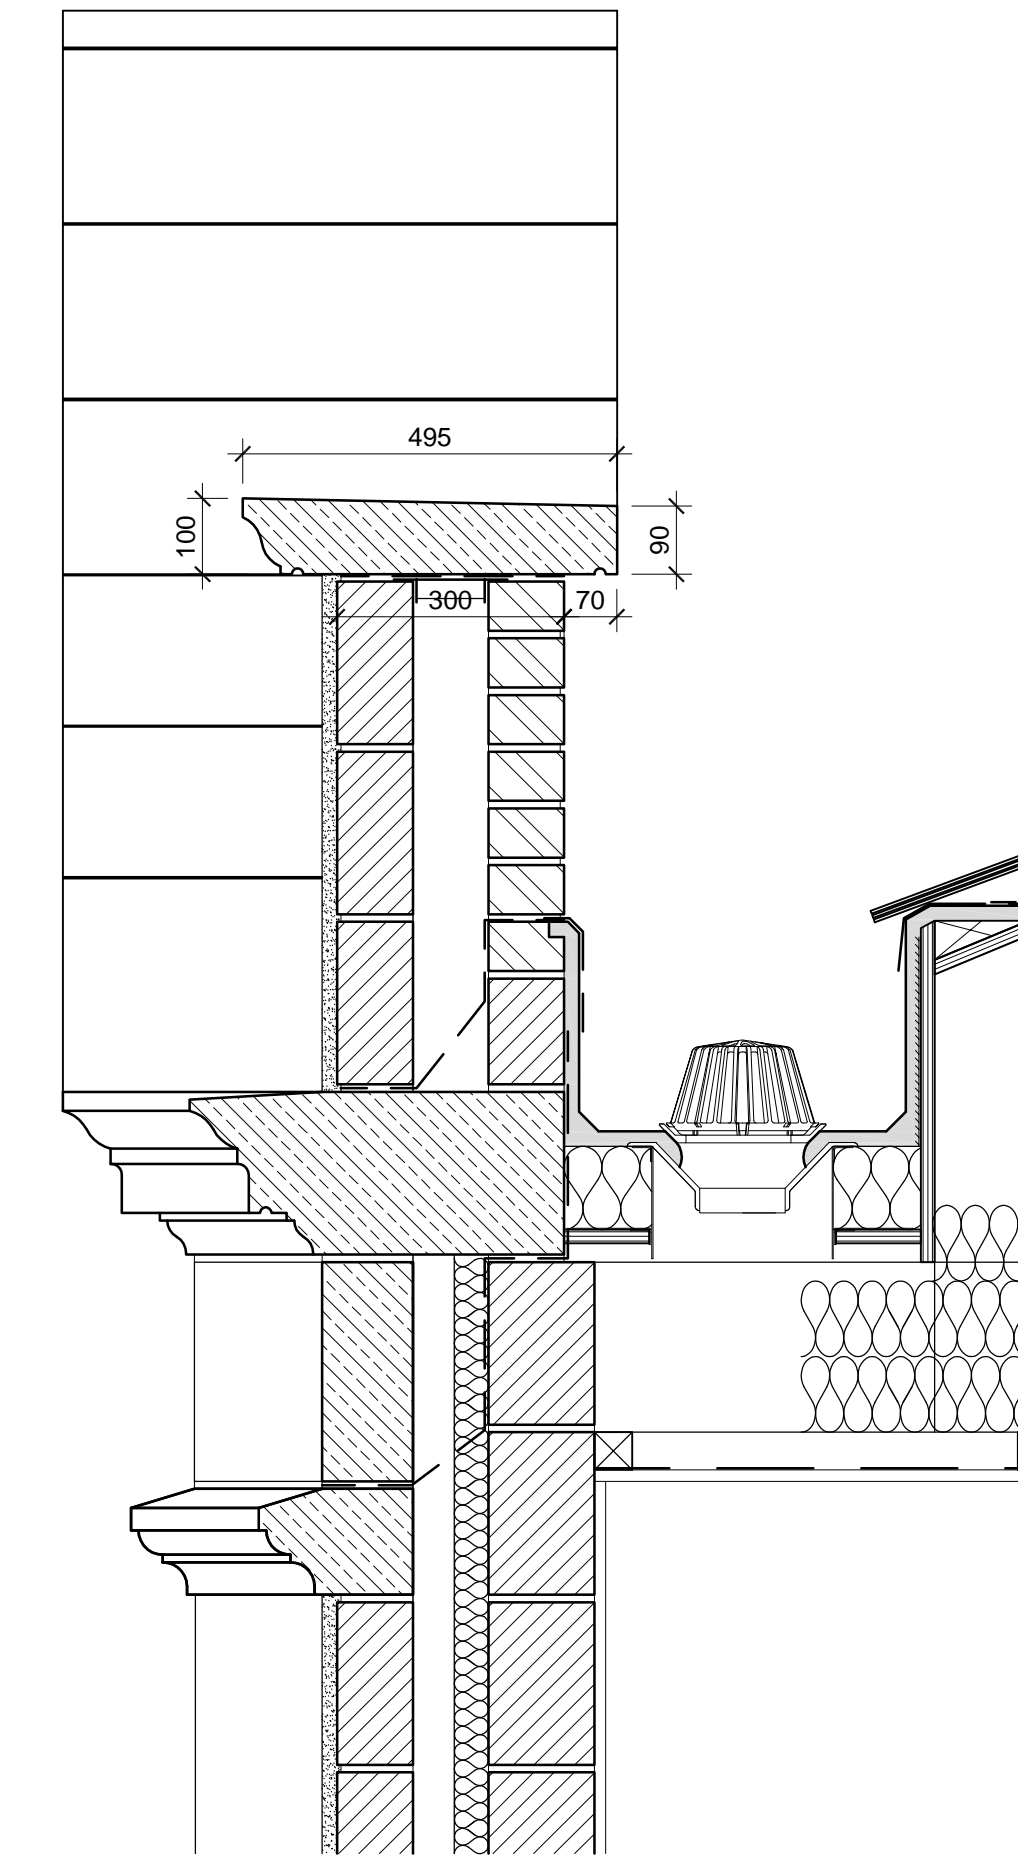


Section H

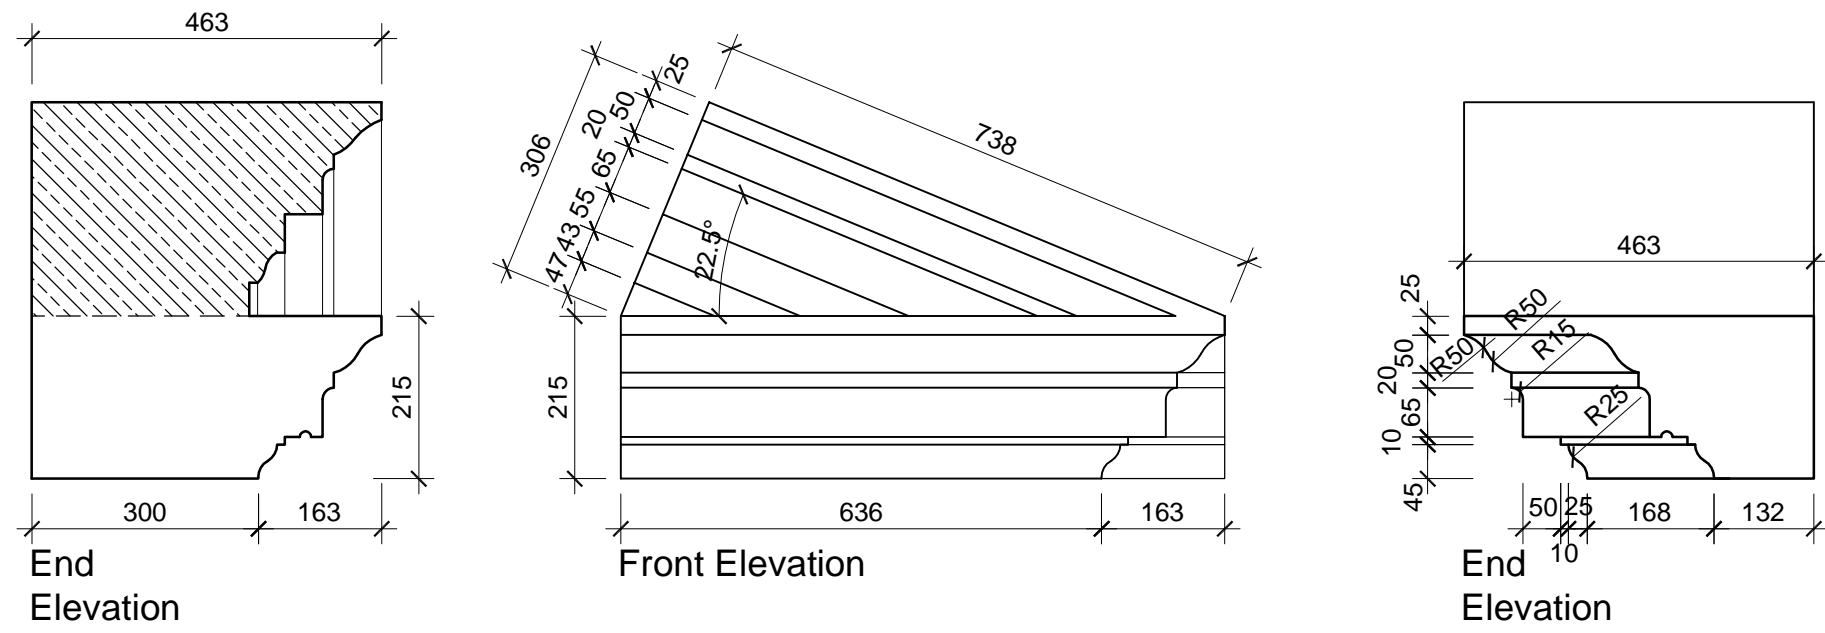


Stone Pediment - Type PED11

1 no Right Hand (as drawn)
1 no Left Hand (Handed)

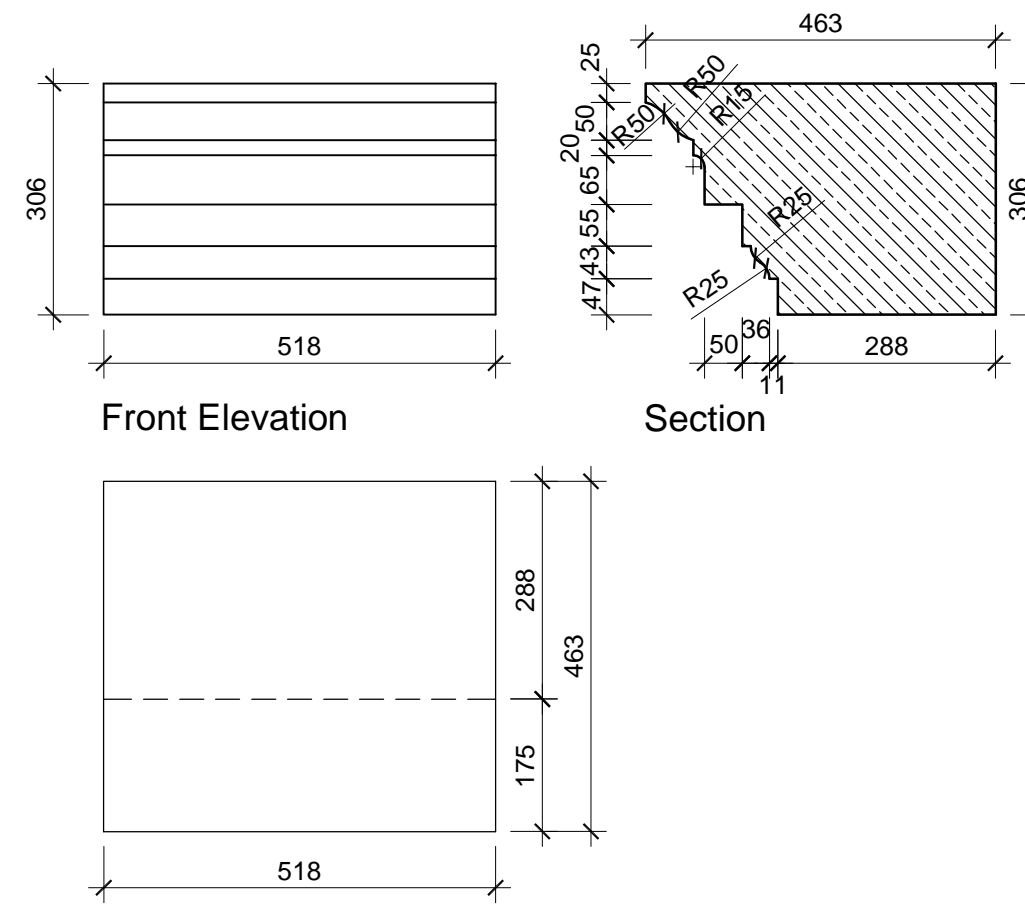


Stone Pediment - Type PED12
4 no required

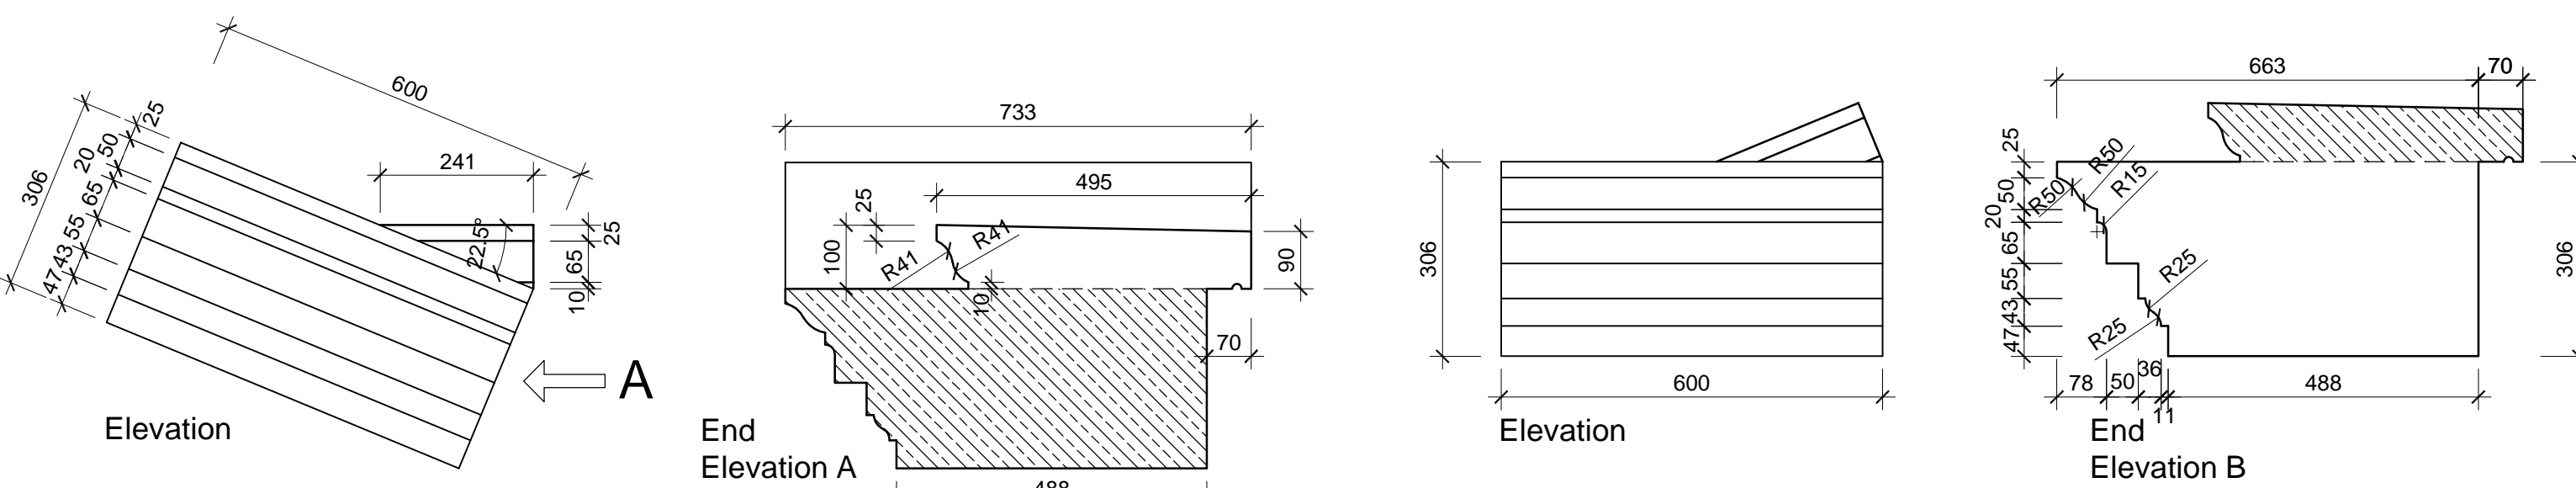


Stone Pediment - Type PED13


1 no Right Hand (as drawn)
1 no Left Hand (Handed)

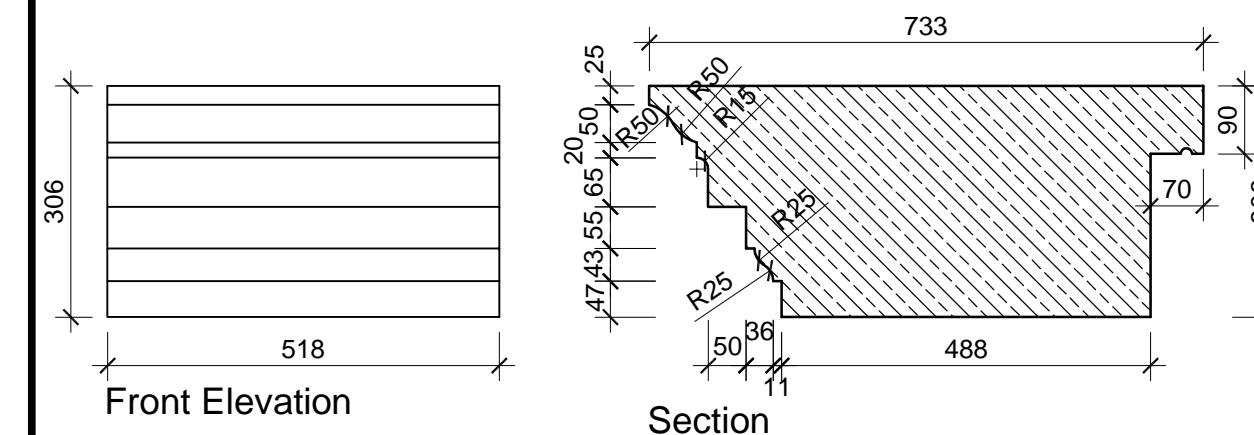


Stone Pediment - Type PED14
4 no required

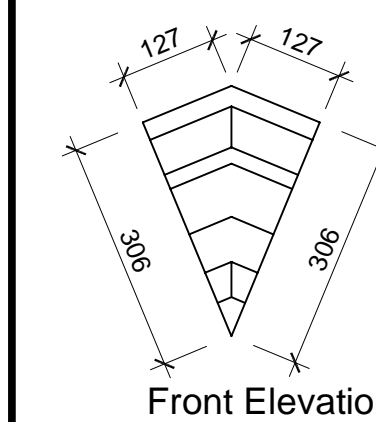


Stone Pediment - Type PED15
1 no required

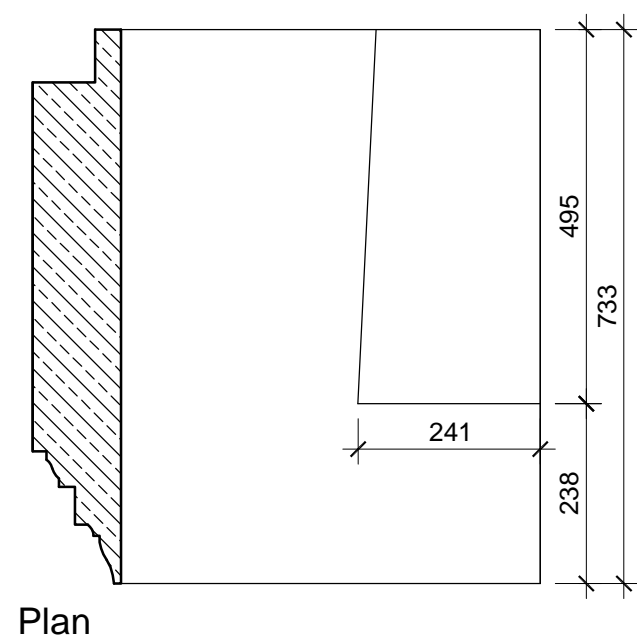

Plan

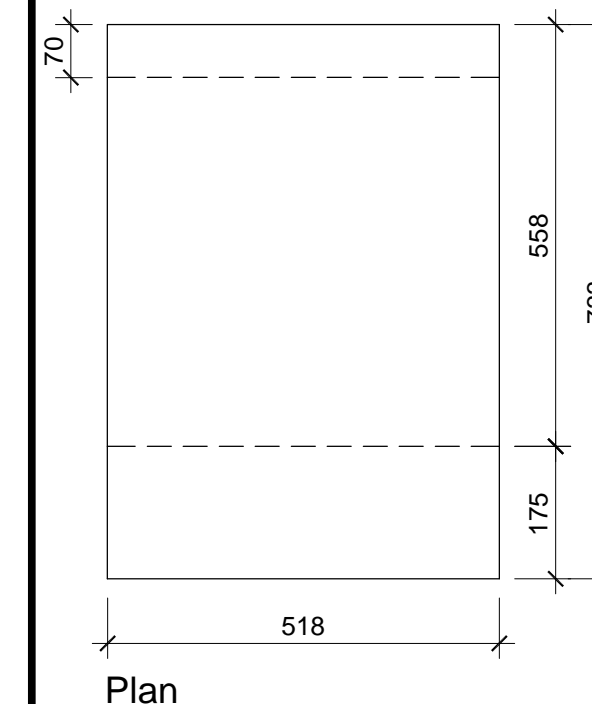

Plan

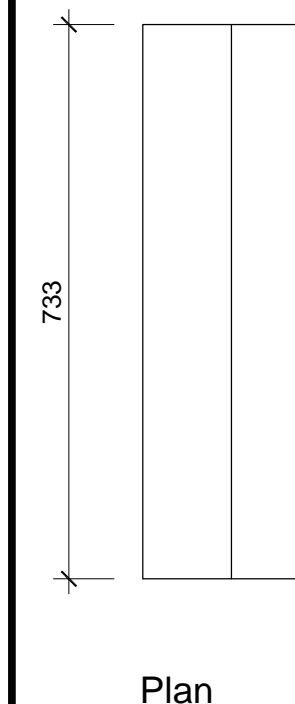

Plan

Notes

- All quantities shown are actual quantities required for each plot. Any excess (for breakage etc.) should be allowed for by the surveyor.
- All stone components are to be smooth PORTLAND STONE finish.
- All components over 25kg are to have recessed lifting eye sockets cast in.
- Any reinforcement deemed necessary by the supplier for safe handling and transportation is to be included.
- Details indicated allow for manufacturing in wet cast acid etched concrete. Details and unit sizes will vary if dry cast is selected.
- Minimum reinforcement for structural members is noted on these drawings. Supplier to provide all other necessary reinforcement in accordance with normal standard / good practice.
- Reinforcement must be provided with 40mm concrete cover. Where ever this cannot be achieved the supplier will be required to use stainless steel reinforcement.
- Supplier will be required to determine both quantities and provide bar bending schedules for reinforcement as necessary - all for suppliers own use.
- Lapped joints in reinforcement bars for stonework concrete will **not** be permitted.
- Concrete strength for all structural stonework and cavity walls to be 35N/mm² at 28 days with 10mm max. aggregate size.
- Supplier to incorporate and supply all necessary fixings in accordance with normal standard / good practice, for all stonework / concrete members. (e.g. dowels, straps, ties, support brackets etc.)

Stone manufacturer to design & detail all units & provide all structural reinforcement to all stone units shown on this drawing which are all load bearing members.

A Construction Issue. 12.07.13

Revision Date



Octagon Developments Limited
Weir House Hurst Road
East Molesey Surrey KT8 9AQ
T: +44 (0) 208 481 7500
F: +44 (0) 208 481 7501
E: Octagon@Octdev.co.uk
W: www.Octdev.co.uk

Project
Overbye, St Georges Hill

Title
Stone Details

Stone Pediment Details

Type D

Status	Drawn	Date
Construction	sh	Jun. '13
Scale	1:50	Job number
Job number	0623	Drawing number
	6017	Revision
		A