

SA Series

www.fluorel.co.uk



SA
Series

05/14



- Shallow surface luminaires
- A classic IP54 lighting luminaire with diffuser for general lighting
- End caps for easy lamp replacement
- Dimmable options
- Integral emergency options

FluorelLighting
Lighting for a brighter future

Fluorel Lighting is a leading supplier of innovative energy efficient lighting

Shallow surface luminaires with opal prismatic controller with turn to lock clip fixing.
 Digital dimming also available. Change L with DDL on catalogue number.
 3 hour duration emergency pack available. Add /EMG as suffix.





SA Series Opal

| Power | Lamp | Weight (Kg) | Product Code | Dimensions (mm) |
|--------|------|-------------|--------------|-----------------------------|
| 1x 28W | T5 | 2.3 | SA128L | 1270 (L) x 200 (W) x 70 (H) |
| 1x 35W | T5 | 2.8 | SA135L | 1560 (L) x 200 (W) x 70 (H) |
| 1x 49W | T5 | 2.8 | SA149L | 1560 (L) x 200 (W) x 70 (H) |
| 1x 54W | T5 | 2.3 | SA154L | 1270 (L) x 200 (W) x 70 (H) |
| | | | | |
| 2x 28W | T5 | 2.4 | SA228L | 1270 (L) x 200 (W) x 70 (H) |
| 2x 35W | T5 | 2.9 | SA235L | 1560 (L) x 200 (W) x 70 (H) |
| 2x 49W | T5 | 2.9 | SA249L | 1560 (L) x 200 (W) x 70 (H) |
| 2x 54W | T5 | 3.2 | SA254L | 1270 (L) x 200 (W) x 70 (H) |
| | | | | |
| 1x 25W | T5 | 2.3 | SA125L | 1270 (L) x 200 (W) x 70 (H) |
| 1x 32W | T5 | 2.8 | SA132L | 1560 (L) x 200 (W) x 70 (H) |
| 1x 45W | T5 | 2.8 | SA145L | 1560 (L) x 200 (W) x 70 (H) |
| 1x 50W | T5 | 2.3 | SA150L | 1270 (L) x 200 (W) x 70 (H) |
| | | | | |
| 2x 25W | T5 | 2.4 | SA225L | 1270 (L) x 200 (W) x 70 (H) |
| 2x 32W | T5 | 2.9 | SA232L | 1560 (L) x 200 (W) x 70 (H) |
| 2x 45W | T5 | 2.9 | SA245L | 1560 (L) x 200 (W) x 70 (H) |
| 2x 50W | T5 | 3.2 | SA250L | 1270 (L) x 200 (W) x 70 (H) |
| | | | | |
| 4x 13W | T5 | 4.15 | SA413L | 670 (L) x 670 (W) x 70 (H) |
| 4x 14W | T5 | 4.15 | SA414L | 670 (L) x 670 (W) x 70 (H) |
| 4x 20W | T5 | 4.15 | SA420L | 670 (L) x 670 (W) x 70 (H) |
| 4x 24W | T5 | 4.15 | SA424L | 670 (L) x 670 (W) x 70 (H) |

Dimming and Emergency Lighting options

Digital dimming versions available – replace the last “L” in the required part number with “DDL”.
 Integral emergency conversions are available for all sizes. Add suffix /EMG for 3hr duration.

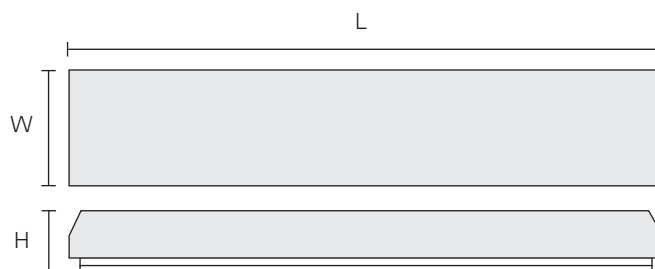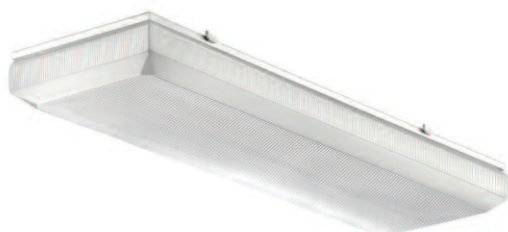

Fluorel Lighting Limited
Designers and manufacturers
of lighting fittings

Unit 25 Eldon Way, Hockley
 Essex SS5 4AD
 Tel +44(0)8458 643 643 Fax +44(0)20 8506 1792
 info@fluorel.co.uk www.fluorel.co.uk

