

T6 IDC

Recessed Fluorescent Range / Indirect with CAT2 Louvre




Direct / Indirect recessed fluorescent luminaire with specular wedge blade louvre and white gull wing reflector.

Specification

- Fabricated steel body
- Suitable for 15-25mm exposed T grid ceiling
- Suitable for plasterboard ceiling (see optional extra)
- Powder coated finish
- Specular wedge blade louvre

Application

- Reception
- Offices
- Call Centre
- Shops
- Conference Room

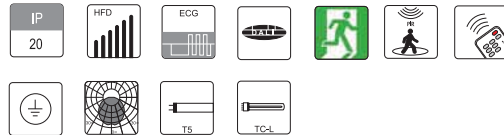

Product Codes

T6IDC155PZ	1 x 55W PLL
T6IDC255PZ	2 x 55W PLL
T6IDC236PZ	2 x 36W PLL
T6IDC240PZ	2 x 40W PLL
T6IDC214FZ	2 x 14W T5
T6IDC224FZ	2 x 24W T5

Add suffix /EM for 3hr Maintained Emergency

Optional Extras

OEM-ATT-01	Plasterboard Recessing Kit
OEM-ATT-02	Surface Conversion Box

Dimensions

