


This unique luminaire with acrylic refractor gives excellent side spill and downward light to produce an efficient optical system. Designed for compatibility with today's LG7 requirements.

Specification

- Fabricated steel body
- Suitable for 15-25mm exposed T grid ceiling
- Suitable for plasterboard ceiling
- Powder coated finish
- Specular wedge blade louvre
- Injection moulded blade louvre

Application

- Reception
- Offices
- Call Centre
- Shops
- Conference Room
- Local Medical Centre

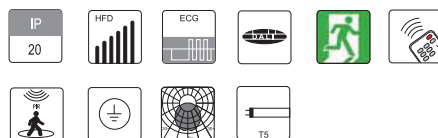

Product Codes

T6RLG314FZ	3 x 14W T5
T6RLG414FZ	4 x 14W T5
T6RLG324FZ	3 x 24W T5
T6RLG424FZ	4 x 24W T5

Add suffix /EM for 3hr Maintained Emergency

Dimensions

