


ISSUE	DESCRIPTION	NAME	DATE
1	NEW DRAWING	BB	25/06/08

Bill Of Material For AD6429				
1	1	001343	MT32 Dry Lining Box 2 Gang With Intumescent	
2	2	001029	MT32 Dry-lining Box Clamp	
3	1	000375	2 Gang 13Amp Switch Socket Mode Range CMA036	
4	1	001306	MT32 Fly Lead Black Connector 164mm	
5	2	001240	M3.5x45 Slotted Csk Hd Screw	
6	2	001189	MT32 LABEL FOR AD6429	
7	1	001307	MT32 Fly Lead White Connector 164mm	
8	1	001211	Pull cable tie 2.5mm x 100mm	



Item 2 Supplied Fitted to Item 1


All Terminal Screws Tighten To 0.2Nm

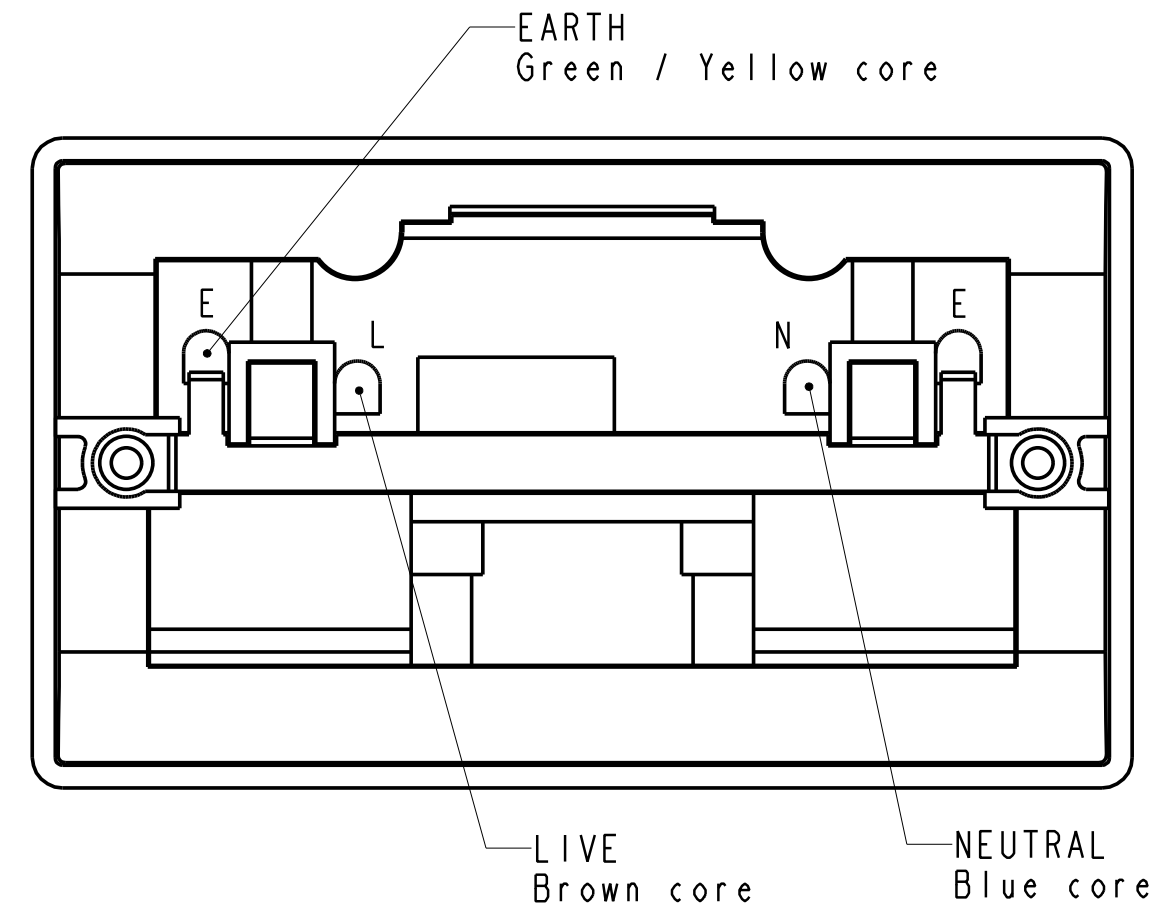


Rear View Of Item 3
Twin Gang Socket Outlet
Note: Terminal positions may vary from that shown

Approval		
Technical		__/__/__
Production		__/__/__
Project		__/__/__

DRG No. SK7020-2	STATUS SK/PR	DESIGNER bruceb	UNITS MM	DATE 25-Jun-08	PROJECT No. 667	DESIGN APP.
 <div>HASTINGS EAST SUSSEX TN38 9YJ</div> <div>TEL: 01424 722280 FAX: 01424 442078 EMAIL engineering@marshall-tufflex.com</div>					ASSET No.	PRODUCTION APP.
					MATERIAL SEE TABLE	THIRD ANGLE PROJ. 
					COLOUR SEE TABLE	
PART CODE ZAD6429C					SURFACE FINISH SEE TABLE	SCALE 1:1
PRODUCT DESCRIPTION Dry-lining Box 2G Through With Intumescent						

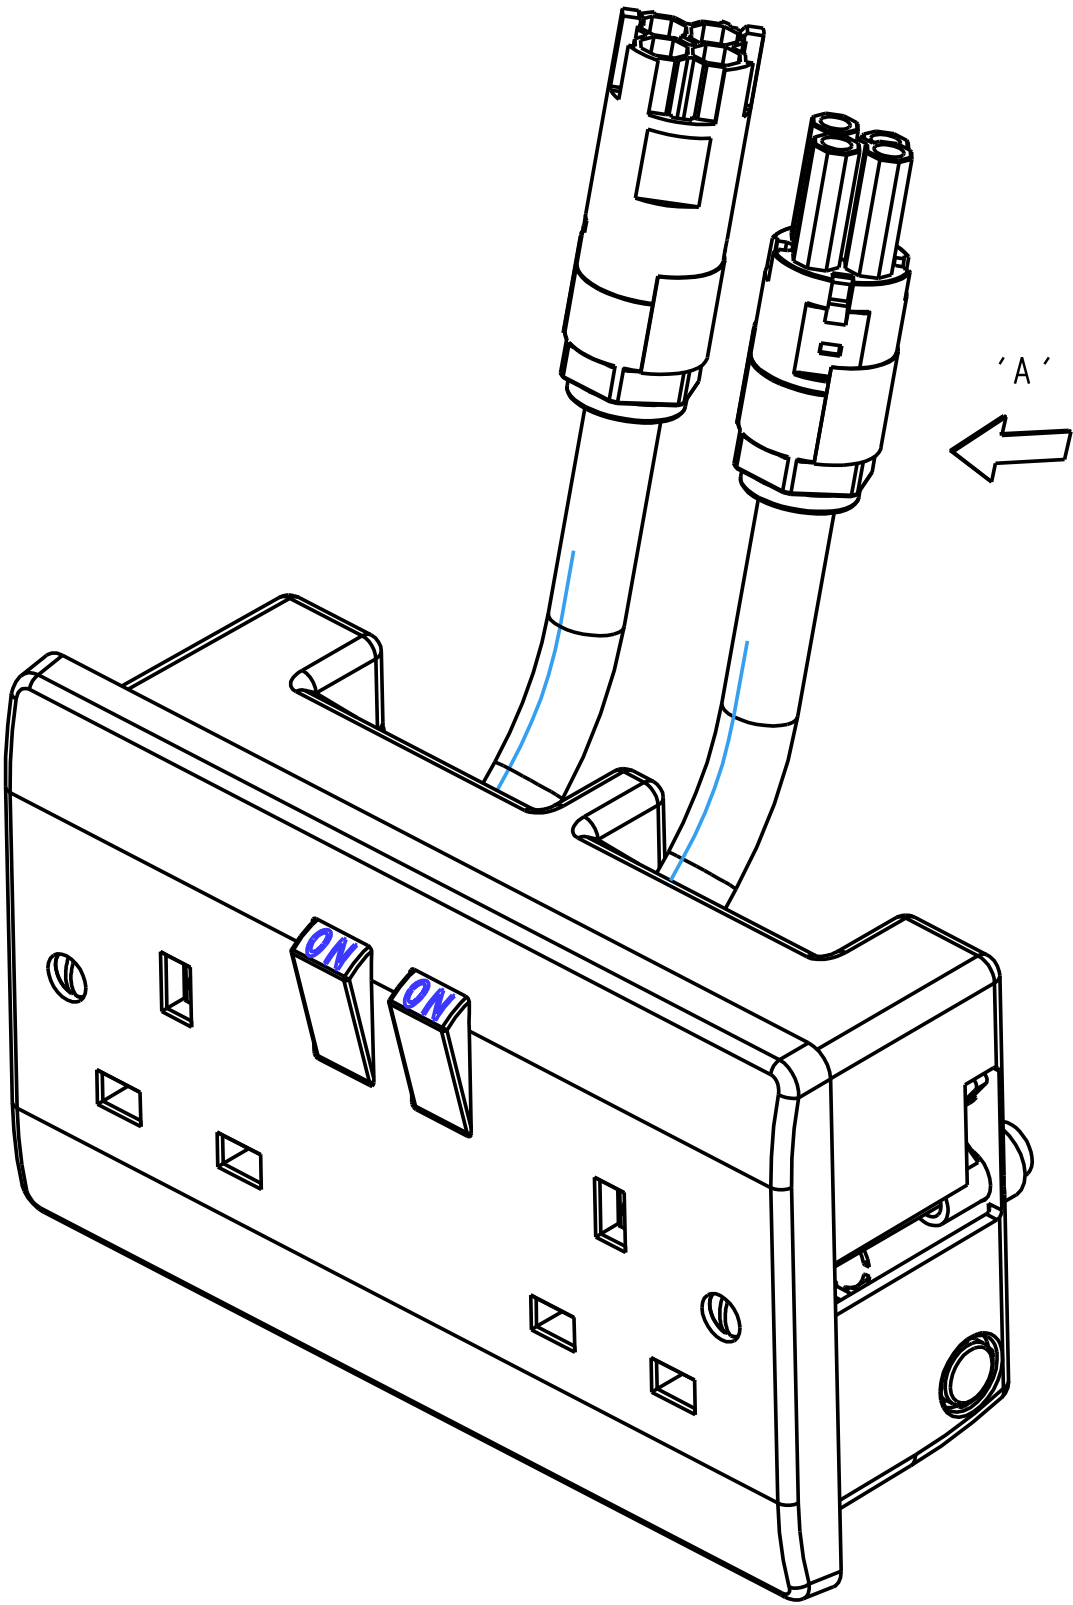

PARTIAL VIEW ON ARROW 'A'

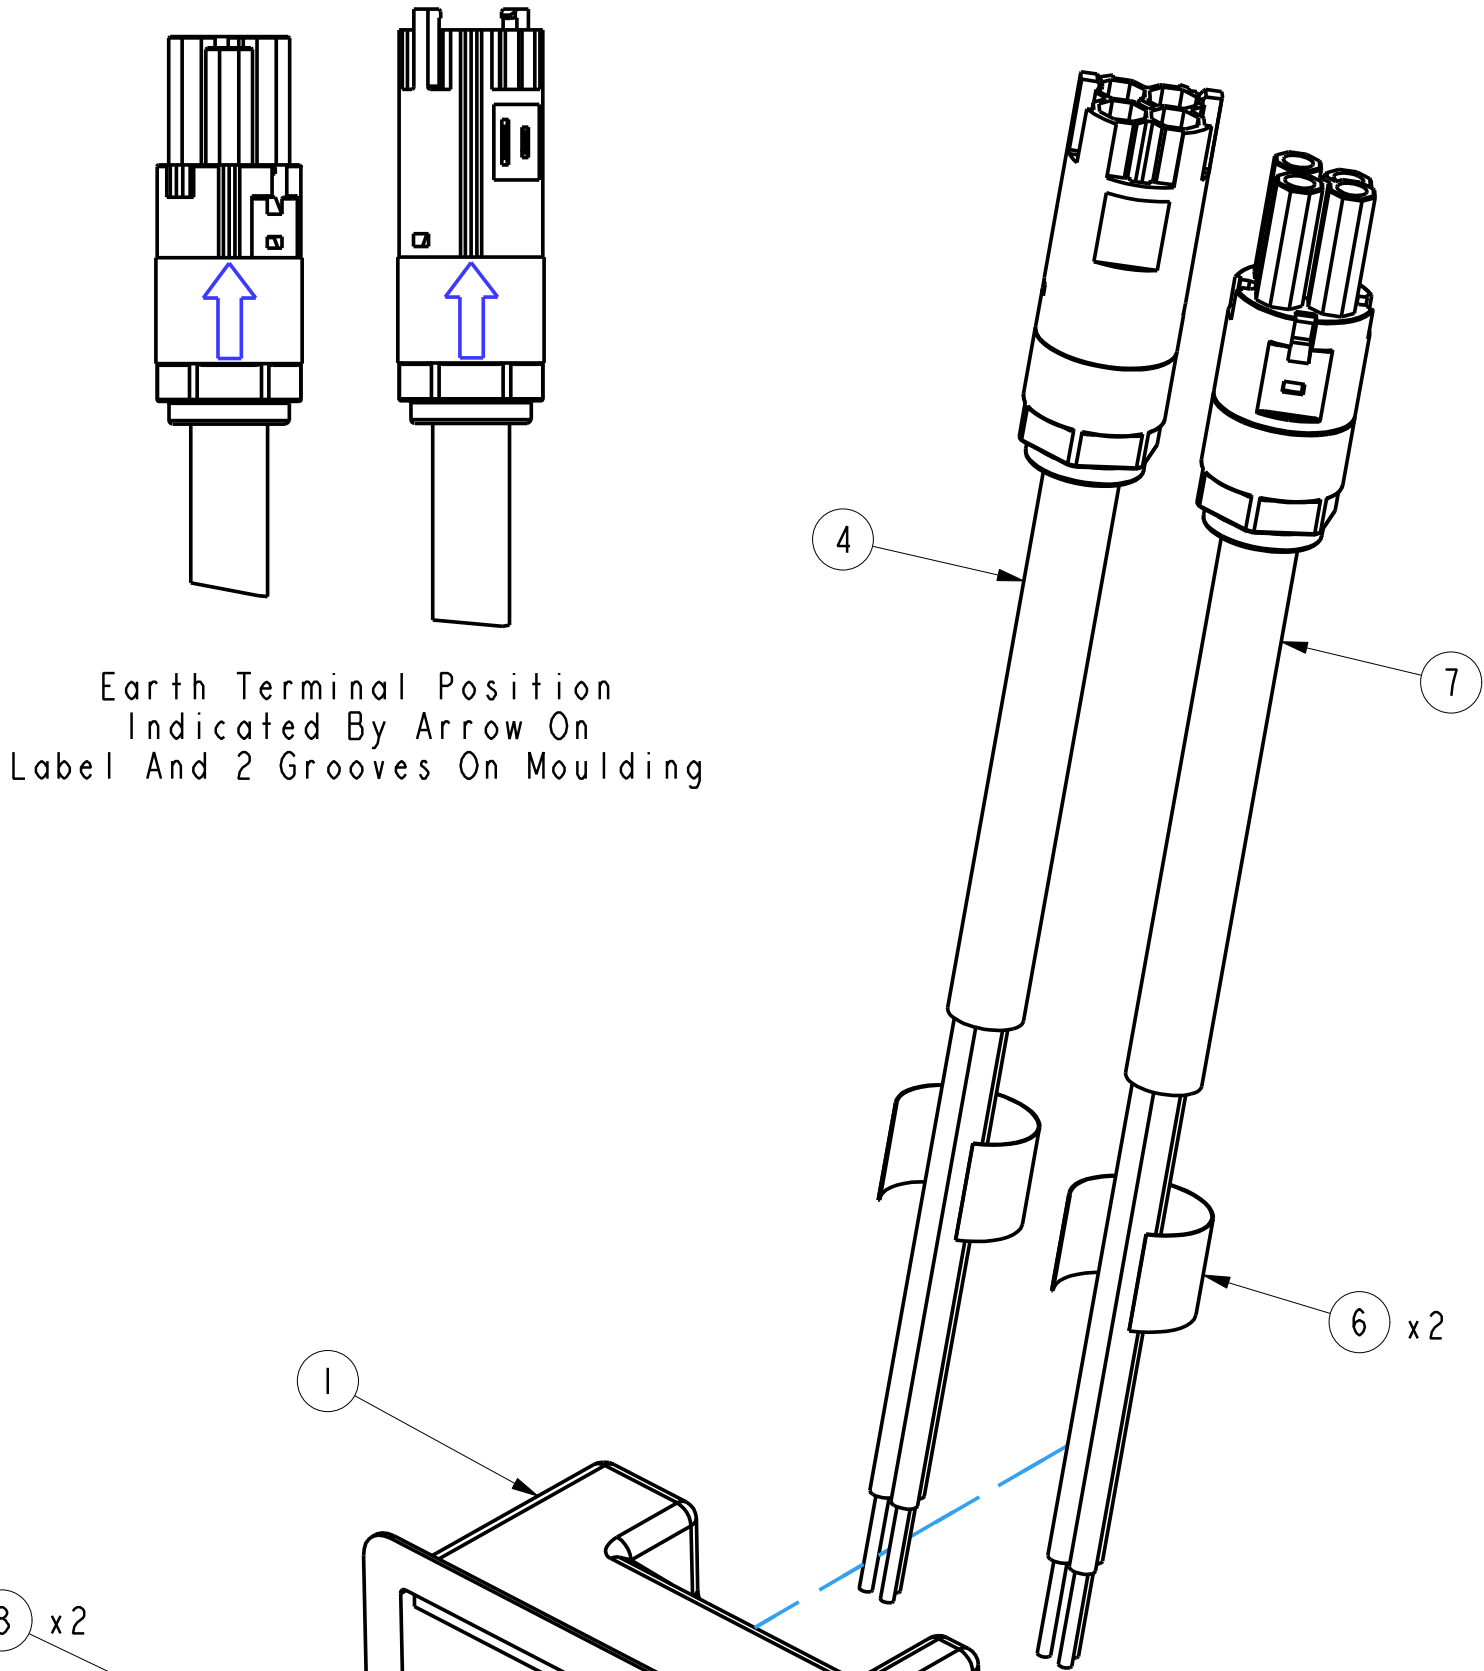

Fitted Around Both Sets
Of Inner Cores, 5mm Bellow
Outer Sheaf

Tighten Torque 0.75Nm 1 x2

