

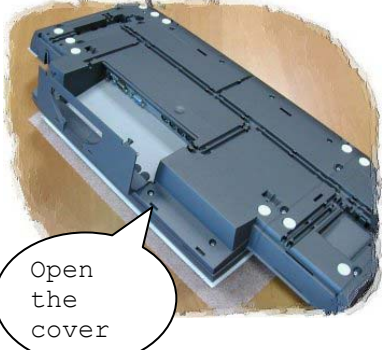


turn TouchMe upside-down

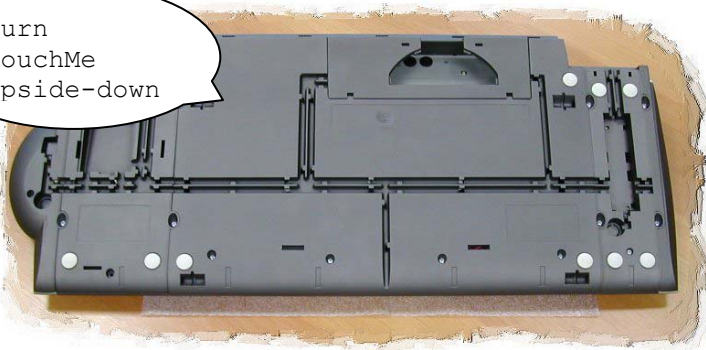

Open the cover

Cables go first through the hole

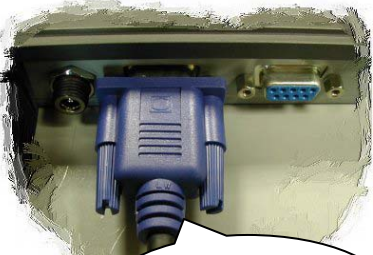


Connect VGA, fasten the 2 screws...

...then the serial cable...




...followed by the connection to the PC (PS2 or serial)

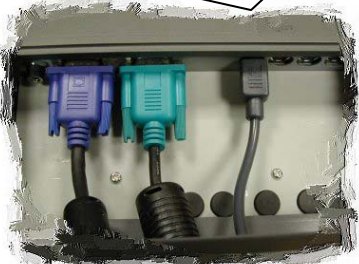

if present, connect an external TouchMe module...




...guide the cable through the canals

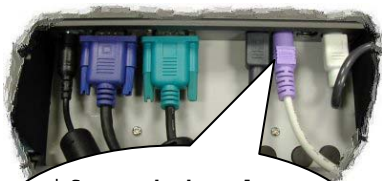

if needed, also a standard IBM PS/2 keyboard can be connected

connect the power

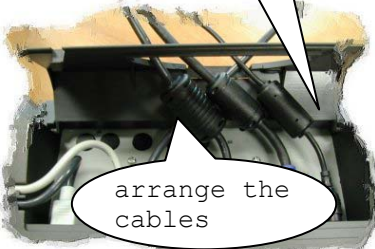

arrange the cables

if the cables have to exit at the back, not at the bottom: clear the precut opening




gently close the cover

BEFORE USING YOUR TOUCHME, SET THE RESOLUTION OF YOUR SCREEN TO 800X600 AND THE REFRESH RATE TO 60Hz!






insert Tipro CD

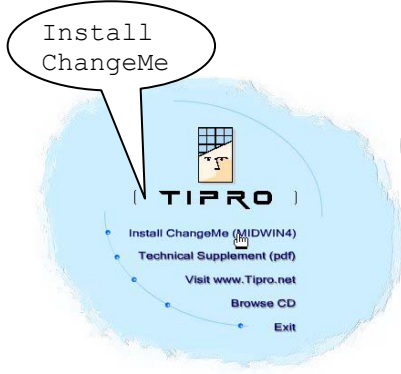


Install ChangeMe

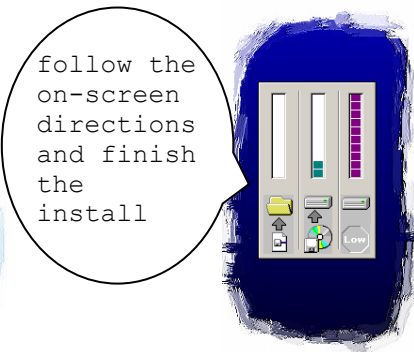

follow the on-screen directions and finish the install

(only needed if you have a touch-screen)



Insert the CD with touch-screen drivers




install the drivers and...

...calibrate the touch-screen




run ChangeMe

Start > Programs > Tipro Keyboards > ChangeMe


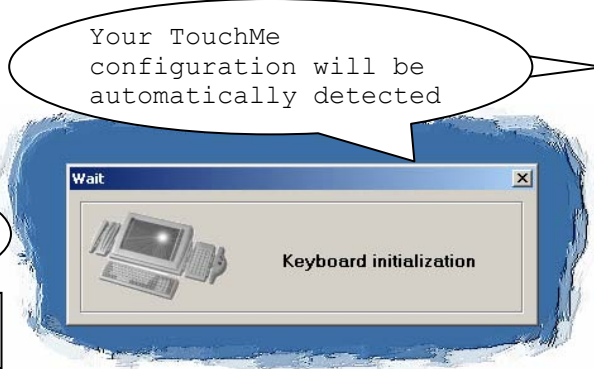


Your TouchMe configuration will be automatically detected

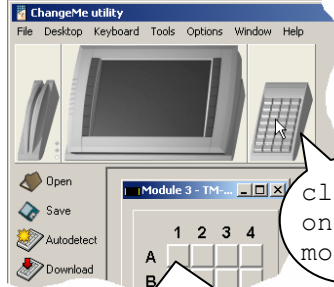


click on the module


click on the key to be defined

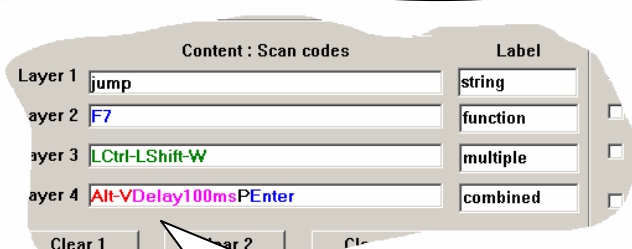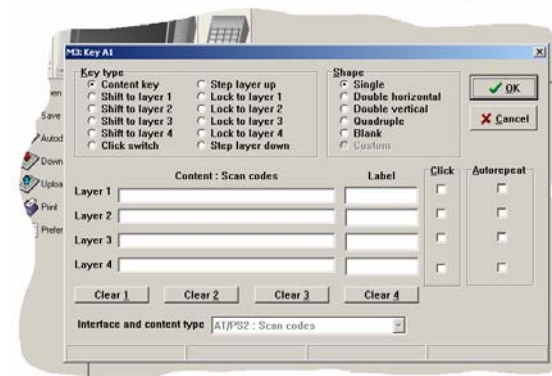

enter the content for each layer

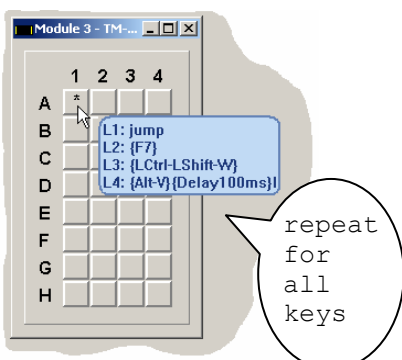

repeat for all keys

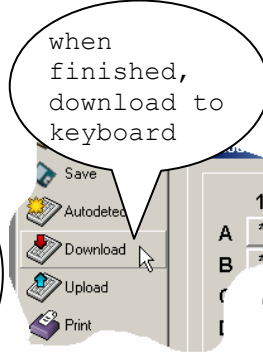

when finished, download to keyboard



and try your new cofiguration!