

The safe replacement system for damaged roof sheets & rooflights

The fragile roof safety revoloution

SAFETY FIRST

Removes the risks associated with accessing fragile roofs

HSE COMPLIANT

Allows compliance with Regulation 9 of the Work at Height Regulations 2005

UNIQUE FIXING METHOD

Allows fragile roof/rooflights to be replaced from the underside

ECONOMICAL

Saves time, reduces installation and access equipment costs

MINIMISES DISRUPTION

No major disruption to internal processes

COMPLETE RANGE

The Fixsafe system caters for most roof profiled sheets and roof configurations used in the UK





The internal fixing system for replacing profiled roof sheets or rooflights

Figures published by the Health & Safety Executive show that falls through fragile roof materials could equate to nearly a quarter of fatal accidents in the construction industry. The Fixsafe system has been developed to address this problem and will play a major part in reducing this statistic.



The Fixsafe system has been designed to allow profiled roof sheets or rooflights to be replaced from below, eliminating the need to access dangerous fragile roofs, thereby increasing safety for maintenance operatives and equipment erectors.

Save lives and save money, too

By removing the requirement for costly safety netting, roof staging, fall protection or external scaffolding, access equipment costs are minimised, on-site time is reduced and lives are not put at risk.

Disruption minimised

The speed and ease with which roof repairs can be carried out using the Fixsafe system brings important advantages to building owners, with reduced disruption and safer working procedures.

HSE compliant

The Health & Safety Executive has responded positively to the introduction of the Fixsafe system as a means of allowing those involved in repairing fragile roofs to work fully in compliance with Regulation 9 of the Working at Height Regulations, 2005.

Quick and simple sheet replacement: 1. Removing hook bolts
2. Extracting existing sheet 3. Drilling new Fixsafe sheet using old sheet as template 4. Installing Fixsafe fixings 5. Locating new Fixsafe sheet 6. Securing Fixsafe fixings 7. The finished installation



A complete system

The Fixsafe system comprises specific GRP replacement sheets to match all popular asbestos and fibre cement profiles, together with patented Fixsafe fixings to allow installation to be carried out from below.

Peace-of-mind

By greatly reducing the risk of serious injury or death, the Fixsafe system brings peace-of-mind to employers and building owners when repair work is required.

Available nationwide


The Fixsafe system is available from FILON distributors throughout the UK.

For details of your nearest distributor, please telephone FILON on 01543 687300, email sales@filon.co.uk or visit







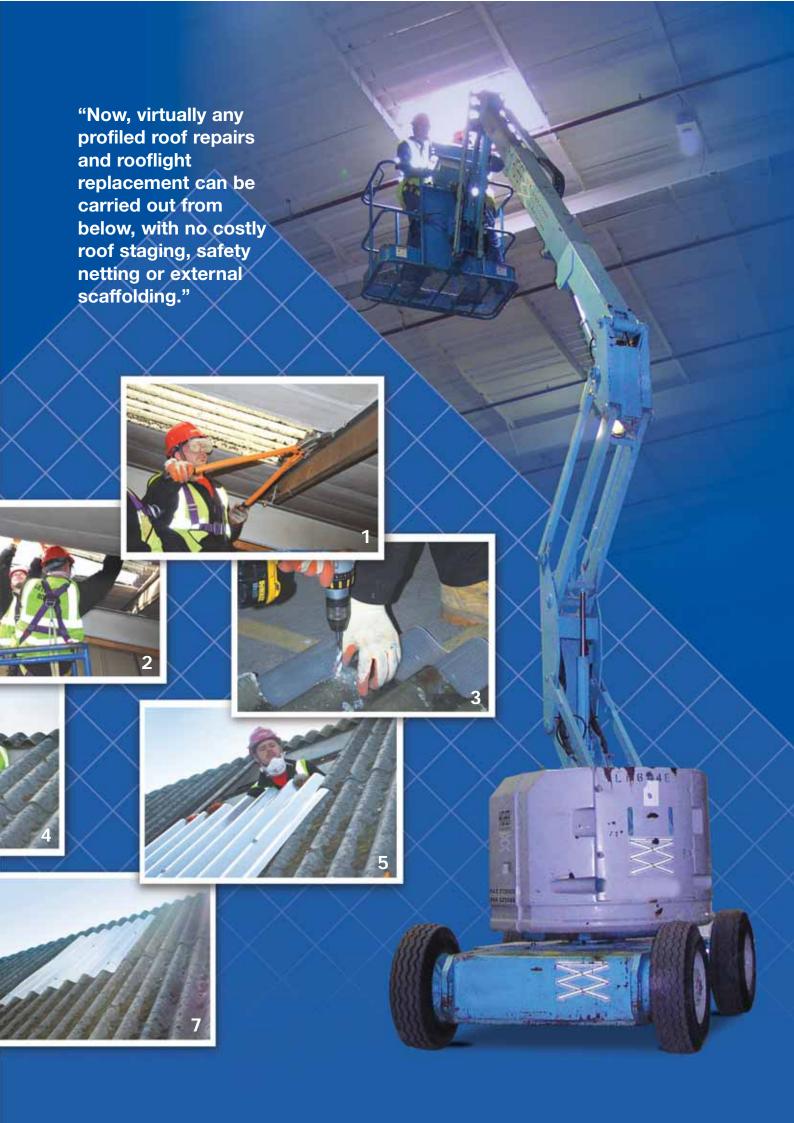

Fixsafe Technical information

Storage

Sheets are generally supplied loose. Store on clean, level battens at centres not exceeding 1.5m. Stacks should not exceed 1m and must not overhang at ends.

Secure and protect from wind and mechanical damage.

Secure and protect from wind and mechanical damage. When stored in open, protect with opaque waterproof covers.

Cutting and drilling

Cut sheets with a hacksaw with 6/8 teeth per centimetre. Best results are obtained if the saw is held at a shallow oblique angle. When cutting with power tools use 40/60 grit diamond blade operating at medium speed.

Operating temperatures

The minimum and maximum temperatures for FILON sheeting are -20°C to +100°C. Sheets will not become brittle or soften at low or high temperatures.

Compatibility

FILON sheeting has no chemical reaction with other <u>established building products.</u>

Fire performance

To meet Building Regulations requirements, sheets are tested under BS476 Fire Tests parts 3 and 7 and have been classified as follows:

Grade 104 - Designated AA, Rated Class 1

Physical properties

FILON Fixsafe sheets are available in translucent and opaque as direct replacements for asbestos cement profiles which are no longer manufactured. To enhance strength and impact resistance, these sheets incorporate additional woven reinforcement. This construction also allows sufficient flexibility to facilitate easy fixing to existing rigid asbestos cement roofs.

When subjected to the ACRM drop test, FILON Fixsafe sheets have been shown to possess at least twice the impact strength of standard GRP Translucent sheeting.

For technical support please telephone 01543 687300.

Fixsafe standard profiles

- Bigsix
- Cape Fort
- Cape Monad
- Doublesix
- Doublesix M
- Major Tile
- Trafford Tile

Also available:

- Cape Trofsec
- Cape Watford
- Cembrit B9
- Compton B5
- Endurite
- Eternit Profile 5
- Eternit Profile 7
- Gleno 252
- Standard 3
- Tegral Coracem Super 4
- Trafford Tile Liner
- Turnall Combined

FILON is a trademark of Filon Products Ltd.

Information and recommendations contained in this publication are given in good faith without warranty or guarantee. We are constantly seeking to improve our products and therefore reserve the right to alter specifications at any time. No liability can be accepted for any claims, losses or demands arising from contents of this publication. This statement does not affect statutory rights which cannot be excluded by agreement.



Filon Products Limited

Unit 3, Ring Road, Zone 2, Burntwood Business Park Burntwood, Staffordshire WS7 3JQ, England

Tel: 01543 687300 Fax: 01543 687 303

Email: sales@filon.co.uk

www.filon.co.uk







