

COMPRESSOR

# LINEAR




MOTOR FREE  
PISTON SYSTEM



# Ac0401A

Airflow & Power Consumption


Specifications

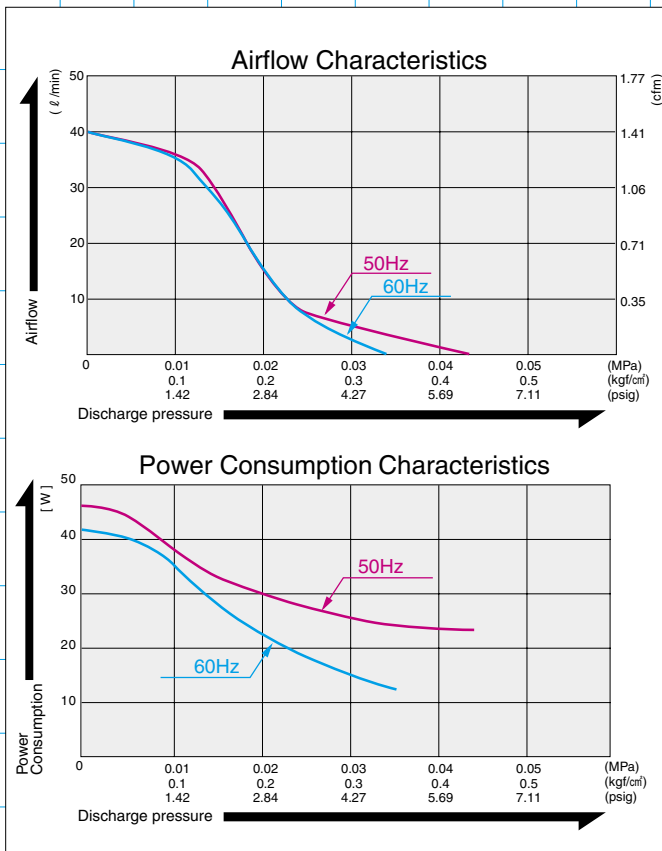


	(SI)	(EURO)	(U.S.A.)
Rated Pressure	0.01 MPa (0.1 kgf/cm <sup>2</sup> )	0.1 bar	1.42 psig
Rated Airflow	35 l / min		1.24 cfm
Rated Voltage	120 V AC or 230 V AC		
Maximum Pressure	0.035 MPa (0.35 kgf/cm <sup>2</sup> )	0.35 bar	4.98 psig
Power Consumption	35 W or 38 W		
Rated Frequency	60 Hz or 50 Hz		
Life Expectancy	10,000 hours		
Outlet	ISO Rc 1/4 (female threaded)		
Duty Cycle	Continuous		
Coil Insulation Class	E or its equivalent (JETL) or B for UL		
Mounting Dimensions	68 (L) x 84 (W) mm	2-11/16" (L) x 3-5/16" (W)	
Gross Weight	1.9 kg	4.2 Lbs.	
Leadwire Length	200 mm	7-7/8"	

Please read the page of "How to Use This Catalog" first for correct use of compressors and pumps.

Application Examples



Bed Sore Prevention Mattress

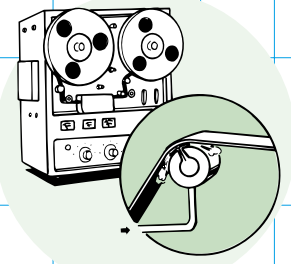

Air Bearing

Sketch Drawing and Mounting Dimensions Diagram (mm)

